

# Measuring and Modulating Brain Activity



## neuroConn NEURO PRAX<sup>®</sup> TMS/tES

### TMS/tES-compatible full-band DC-EEG bio- and neurofeedback system

NEURO PRAX<sup>®</sup> TMS/tES systems measure physiological signals such as EEG, EMG, and EP simultaneously and synchronously for all channels. Unique amplifier technology captures EEG activity from ultraslow (0 - 0.3Hz) to ultrafast (80 - 1,200 Hz) frequencies. The high amplifier dynamics and the high sampling rate make the NEURO PRAX<sup>®</sup> TMS/tES system particularly suitable for EEG measurement during transcranial magnetic stimulation (rTMS) and transcranial electrical stimulation (tES) with tDCS, tACS and tRNS. Our high-performance full-band DC-EEG amplifiers are available with 32, 64 or 128 channels. They provide a wide range of optional software-based functions such as the online correction of artifacts caused by muscle and eye movements, topographical analyses, spectral and amplitude mapping and online averaging.

The NEURO PRAX<sup>®</sup> TMS/tES is a bio- and neurofeedback system. Neurofeedback is a treatment method based on operant conditioning. It allows the patient to perceive and self-regulate their brain activity. The method is well-accepted in psychology and used in instrument-based behavioral therapy. Neurofeedback is probably therapeutically effective in the treatment of ADHD and it possibly reduces the number of seizures in patients with epilepsy, if previous established treatment were unsuccessful.

#### Areas of application/treatments

Neurofeedback	DC-EEG neuro- and biofeedback system, quantitative EEG, cognitive evoked potentials
TMS/MEP	MEP threshold detection, MEP brain mapping (via the TMS navigation system Brainsight <sup>®</sup> )
tES/rTMS-EEG	Quantitative EEG analysis and cognitive evoked potentials before, <u>during</u> and after transcranial stimulation, examinations relating to the safety of transcranial stimulation
TMS-EEG	Recording and analysis of cortical and subcortical TMS-EEG activities, examination of the functional connectivity between areas of the brain, examination of TMS-induced modulation of brain rhythms, EEG-triggered TMS stimulation

Moving thought

neuroCare 

### NEURO PRAX<sup>®</sup> TMS/tES features

- 32-channel full-band DC-EEG bio- and neurofeedback system (64, 128 channels)\*
  - Channel type (EEG, EMG, ECG) selectable via software
  - Non-referential storage of raw data
  - Specially for measuring during transcranial magnetic stimulation (TMS) and transcranial electrical stimulation (tDCS, tACS, tRNS)
  - Recovery time 3-5 ms after TMS impulse
  - Real-time correction of artifacts from TMS and electrodes
  - Suitable for polygraphy and polysomnography
  - Simple and intuitive user interface
  - EEG mountings and event markers freely selectable
  - Patient database with medication and examination calendar, complete documentation of readings
  - Topographical analysis, spectral and amplitude mapping
  - Connection of external triggers
- \* optional

### NEURO PRAX<sup>®</sup> TMS/tES specifications

#### full-band DC-EEG and BIOSIGNAL AMPLIFIER


- 32 full-band DC-channels (64, 128 channels)\*
  - Input impedance > 10 GΩ
  - 24-bit resolution per channel
  - Selectable sampling rates of 64 to 4,096 sps
  - Frequency range of 0 to 1,200 Hz @ 4,096 Hz sampling rate
  - Common mode rejection rate (CMRR) > 90 dB @ 50 Hz
  - Dynamic input range approx. ± 219 mV
  - Input noise < 0.9 μV (RMS) @ 0 - 110 Hz at 256 sps
  - Max. power consumption 1.5 W
  - Power supply via built-in rechargeable batteries
  - Continuous operation time > 8h
  - Applied part BF
  - Dimension: 290 mm x 130 mm x 200 mm (W x D x H)
  - Weight: 4.2 kg (incl. batteries)
  - Data transmission via optical fiber
  - Electrode input box, incl. connector cable (32, 64, 128 channels)
- \* optional

#### PANEL-PC

- Powerfull Intel<sup>®</sup> Core™ Duo processor, 1 GB RAM, 160 GB hard disc, USB2.0, ethernet interface (LAN), min. 15" TFT color monitor, keyboard, mouse
- Operating system WINDOWS<sup>®</sup>7 (and later)
- Dimensions: 420 mm x 365 mm x 170 mm (W x D x H)
- Weight: 11.6 kg (incl. stand)
- Operating voltage: 110-240 V @ 50/60 Hz AC

### NEURO PRAX<sup>®</sup> TMS/tES options and system extensions

- Module to correct EEG artifacts (blinking, eye movement, body movement) in real time (not with TMS)
- Module TMS-MEP threshold detection
- Module for cognitively evoked potentials: CNV, P300, ERN, CPT-OX, and readiness potential
- NEURO PRAX<sup>®</sup> TMS/tES examination license from other PCs
- Module for online data access via Ethernet by TCP/IP
- Export module for exporting measured data in other formats
- Module for data access within MATLAB<sup>®</sup>/Simulink<sup>®</sup>, LabVIEW<sup>®</sup>, C/C++
- Optical trigger input module system extension
- Feedback module system extension (additional monitor)
- Rechargeable battery pack
- Equipment trolley

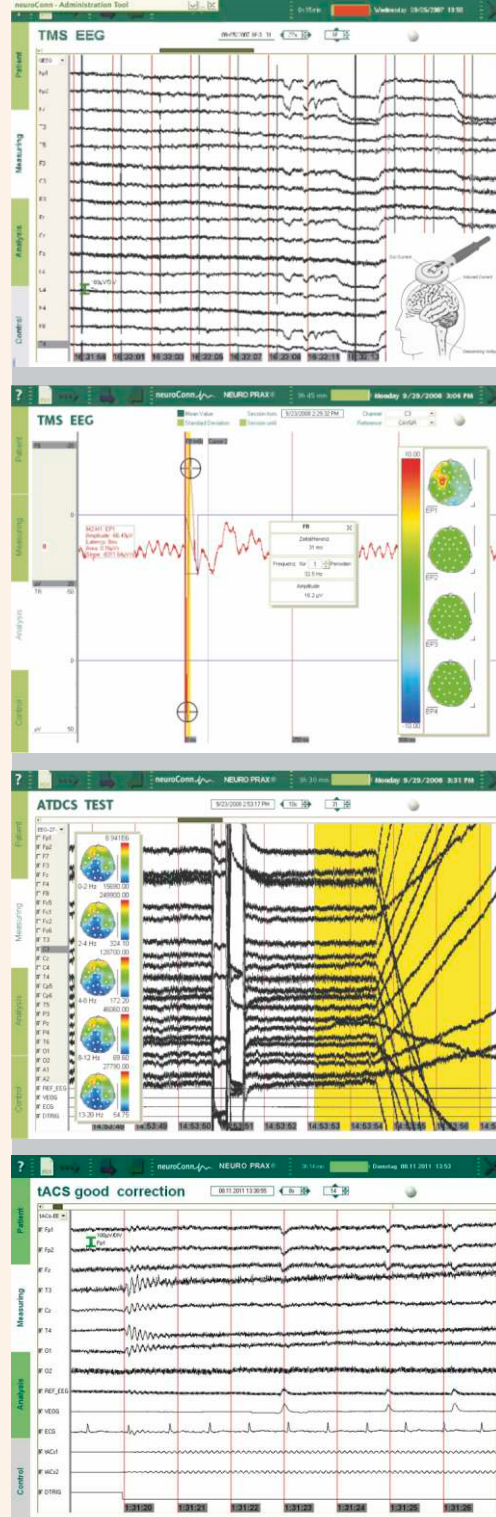

09/17 | 20NPTMS/tES01E

We reserve the right to make changes and improvements in line with technical developments.



neuroCare Group GmbH  
Rindermarkt 7  
80331 München  
Germany

T +49-89-215 471 299 5  
F +49-89-215 471 299 1  
info@neurocaregroup.com  
www.neurocaregroup.com



neuroConn GmbH  
Albert-Einstein-Straße 3  
98693 Ilmenau  
Germany

SPONSORED BY THE

