

THERA PRAX® Q-EEG

Measuring and Modulating Brain Activity



for therapeutic application

DC-EEG bio- and neurofeedback system

The THERA PRAX® Q-EEG is a portable DC-EEG neurofeedback and biofeedback system.

Biofeedback is a treatment method, based on operant conditioning. In this method the patients receive feedback about their physiological states and changes in these states, which mostly cannot be perceived by the patient. Slow Cortical Potential Neurofeedback (SCP-NFB) is a kind of biofeedback and therefore a method in instrument-based hehavioral therapy. It allows the patient to perceive and self-regulate their brain activity. SCP-NFB is probably effective in the treatment of ADHD.

In addition, the THERA **PRAX**® Q-EEG reliably records multi-channel EEG, ECG, and EMG signals as well as peripherical biosignals. To individually control the progress of therapy, cognitive evoked potentials can be recorded.

Advantages of the THERA PRAX® Q-EEG

- neurofeedback of the slow cortical potentials (SCP) with automatic online correction of artifacts caused by muscle and eye movements
- neurofeedback with frequencies (Delta, Theta, Alpha, Beta, SMR, Gamma and any desired band) and ratios (e. g. beta/theta)
- biofeedback training with breathing, temperature, GSR, pulse curve
- · recording of a quantitative EEG in combination with peripheric signal



THERA PRAX® Q-EEG Features

- · 22-channel full-band Q-EEG, DC-EEG and biofeedback (optional) system
- DC-EEG feedback of slow cortical potentials (SCPs)
- generation of Q-EEG, spectral analysis with interface to "NeuroGuide" software
- · neurofeedback with frequencies (alpha, theta, beta, delta, SMR and any desired bands) and ratios (e. g. beta/theta).
- · free choice of frequency band, algorithm and combinations of the two (ratio, correlation, coherence, bicoherence etc.) Free choice of feedback channel (unipolar, bipolar, source, multi-channel)
- biofeedback with EMG, ECG, HR Audio-visual feedback and animation
- patient database with medication and examination calendar, complete documentation of readings
- · analysis of single session and comparison of multiple sessions
- suitable for polygraphy and polysomnography

THERA PRAX® Q-EEG Specifications

Full-band DC-EEG and BIOSIGNAL AMPLIFIER


- · 22 full-band DC channels, referential
- · input impedance > 10 G
- 24 bit resolution per channel
- selectable sample rate of 32 to 4,096 sps
- frequency range of 0 to 1,200 Hz depending on sampling rate
- · common mode rejection rate (CMRR) > 90 dB @ 50 Hz
- dynamic input range ± 175 mV
- input noise < 0.9 µV (RMS) @ 0 110 Hz at 256 sps
- · power consumption approx. 0.9 W
- · power supply via replaceable, rechargeable batteries
- · continuous operation time > 8 h
- applied part type BF
- dimensions: 13.5 cm x 23.5 cm x 6.5 cm (W x D x H), weight: 0.8 kg
- · data transmission using optical cable

PANEL-PC:

- Intel CPU, min. 2 GHz, min. 2 GB RAM, min. 250 GB hard disk, USB 2.0, network connection
- WINDOWS®10 (and later), min. 15" TFT color monitor, keyboard, mouse
- dimensions: 42.0 cm x 36.5 cm x 17.0 cm (W x H x D), weight: 6.8 kg

THERA PRAX® Q-EEG Options

- module to correct EEG artifacts (blinking, eye movement, body movement) in real time
- · cognitive evoked potentials module: CNV, P300, ERN, readiness potential
- · multimedia module
- export module for data export
- · secondary monitor for the patient
- 4 polygraphy channels: breathing, temperature, GSR, pulse curve
- equipment trolley

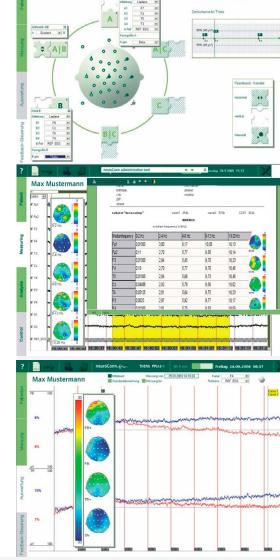



Level 19, 56 Pitt St Sydney NSW 2000, Australia T+61-2-8317 5032 sydney@neurocaregroup.com www.neurocaregroup.com



Albert-Einstein-Str. 3 98693 Ilmenau Germany





Max Mustermann



C € ₀₁₂₃